The Contract Heat Treatment Association Newsletter

HOTLINE

Issue No. 161
September 2020

Inside . . .

	Page
• *Surface Engineering Gala Dinner and Awards 2021*	3
• *Advanced Engineering 2020* - an exhibiting opportunity for CHTA/SEA members	4
• Challenges and benefits of "thru-process" temperature profiling in the heat treatment industry	7
• SEA Awards – an invitation to participate as sponsor, entrant and/or guest	13
• Register for *Hotline*	14
• Diary	16
• Market movements	16
• Nickel price	16

CHTA Secretariat

Items for inclusion in *Hotline* and enquiries about CHTA activities should be addressed to:

Contract Heat Treatment Association
c/o SEA / BATF,
Federation House, 10 Vyse Street,
Birmingham B18 6LT
Tel: 0121 329 2970 (or 0121 237 1123)
Fax: 0121 237 1124
E-mail: mail@chta.co.uk
Website: **www.chta.co.uk**

CHTA Secretary and *Hotline* Editor:
Alan J. Hick B.Sc., C. Eng., FIMMM

The Contract Heat Treatment Association is not responsible for the statements made or opinions expressed by contributors to *Hotline*.

CHTA is affiliated to the Surface Engineering Association

CHTA MEMBERS COPING WITH THE IMPACT OF THE CORONAVIRUS CRISIS

Second-quarter turnover down a third on 2019

Market Movements

ANALYSIS OF QUESTIONNAIRE REPLIES RELATING TO 26 CHTA MEMBER SITES

"THIS QUARTER" =

1 APRIL – 30 JUNE 2020

= TURNOVER INDEX 100

OVERALL ANALYSIS (26 SITES)	Mean index
This quarter last year (1 April – 30 June 2019)	**149.8**
Last quarter (1 January – 31 March 2020)	**140.8**
Predicted next quarter (1 July – 30 September 2020)	**121.9**

Cautious optimism for third-quarter performance

PRI℠
PERFORMANCE REVIEW INSTITUTE

Since being established as a not-for-profit trade association in 1990, ***Hotline sponsor*** PRI has become the global authority in facilitating industry-managed programs and administering critical process accreditation programs, as well as developing web-based audit management software. (https://p-r-i.org/)

Supporting heat treaters

Upcoming PRI heat-treatment-related courses in the UK

September 14-15 2020: **INTRODUCTION TO PYROMETRY** Manchester
October 19-20 2020: **INTRODUCTION TO PYROMETRY** Derby
October 21-22 2020: **HEAT TREATING (OWNER)** Derby
November 9-10 2020: **NADCAP AUDIT PREPARATION - HEAT TREAT** Coventry
November 11-12 2020: **INTRODUCTION TO PYROMETRY** Coventry

For details, go to: *https://www.pri-training.com*

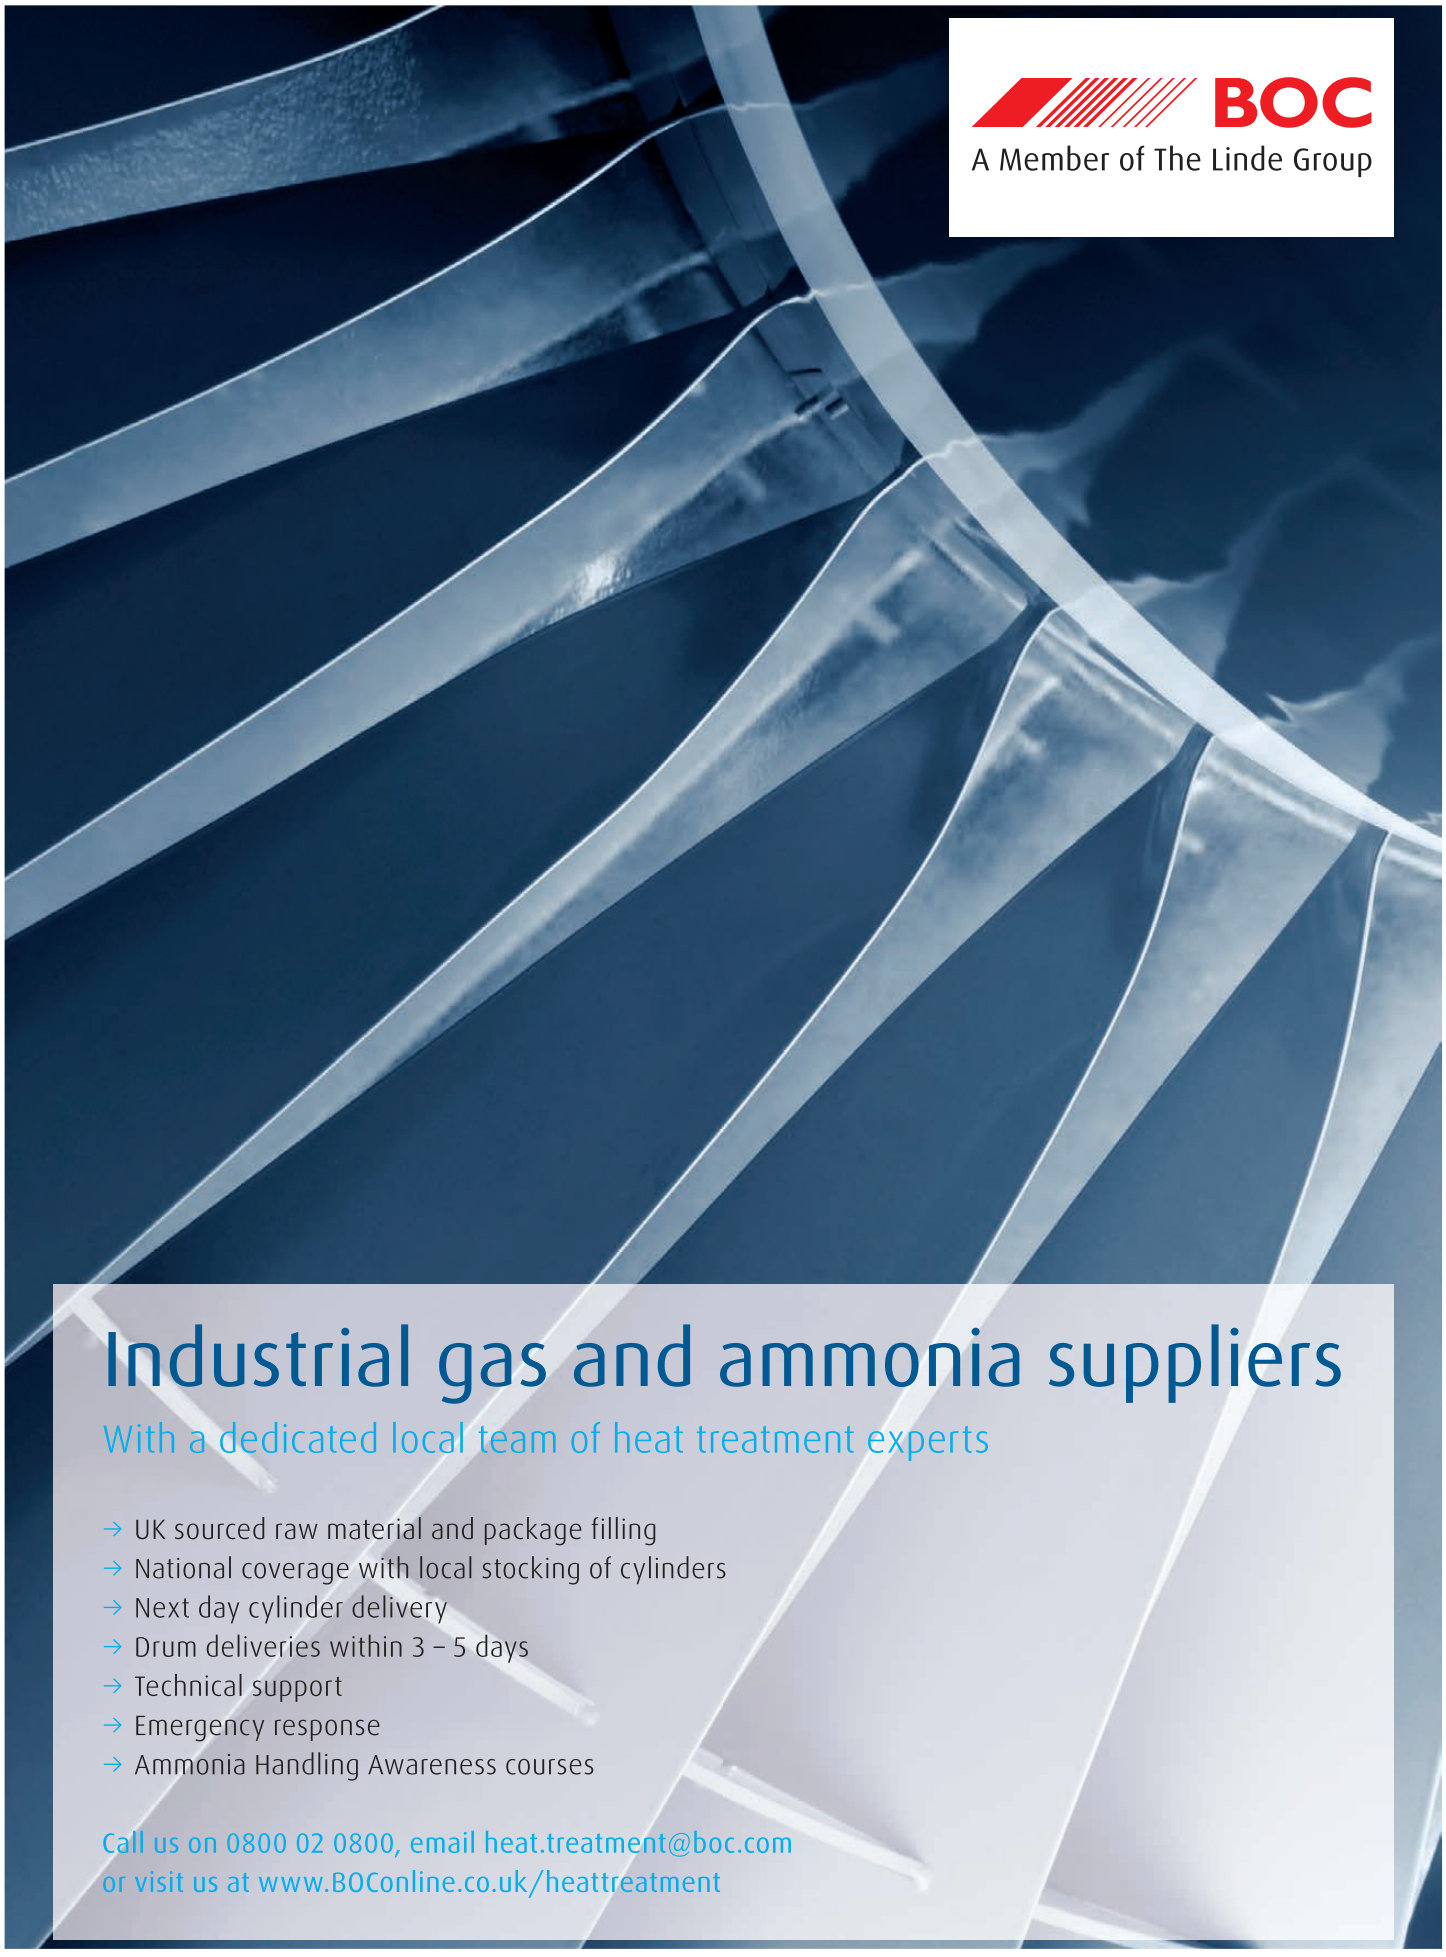
BOC
A Member of The Linde Group
Industrial gas and ammonia suppliers
With a dedicated local team of heat treatment experts
→ UK sourced raw material and package filling
→ National coverage with local stocking of cylinders
→ Next day cylinder delivery
→ Drum deliveries within 3 – 5 days
→ Technical support
→ Emergency response
→ Ammonia Handling Awareness courses
Call us on 0800 02 0800, email heat.treatment@boc.com
or visit us at www.BOConline.co.uk/heattreatment

Previous award winners from CHTA member companies

Surface Engineering Gala Dinner and Awards 2021

March 19, 2021 at Park Regis Birmingham

Does your company deserve an award?

Marketing award? For a member company that has demonstrated an outstanding planned approach to marketing its products/services.	**Quality award?** For a member company that best demonstrates a successful approach to achieving excellence in quality of its products/services.	**Outstanding company achievement award?** For a member company that has clearly demonstrated great success over one or more of the other categories.
Environmental award? For a member company that best demonstrates a successful approach to good practice and excellence in environmental responsibility.	**Process innovation award?** For a member company that best demonstrates success in introducing new or modified technology.	**JUDGED ON YOUR SUBMISSION** **Deadline: 3.00pm, 18th December**

Do you deserve an award?

Award for meritorious service to the heat treatment industry? Co-sponsored by CHTA	**Ray Alford individual achievement award?**	**JUDGED ON NOMINATION BY YOUR PEERS** **Deadline: 3.00pm, 18th December**

These prestigious awards are open to all members of SEA/CHTA.
For details about application procedure and sponsorship opportunities, go to:

www.sea.org.uk/2021-awards/

ADVANCED ENGINEERING 2020
4 & 5 November 2020 | NEC, Birmingham
The UK's largest annual gathering of OEMs and supply chain professionals
AERO ENGINEERING
COMPOSITES ENGINEERING
AUTOMOTIVE ENGINEERING
PERFORMANCE METALS ENGINEERING
CONNECTED MANUFACTURING
MEDICAL DEVICE ENGINEERING
EXHIBIT ON THE SEA PAVILION
• Special discounted stand prices
• Gain unparalleled exposure to 15,000+ visitors over two days
• Enjoy face-to-face access to OEMs and Tier 1 & 2s across multiple sectors
• Raise your company profile and get ahead of your competitors
• Meet new customers at your own ready-to-go stand in a high-profile location
Headline Partner
SEA
SURFACE ENGINEERING ASSOCIATION
For further details and to book your stand contact:
Michaella Mais: +44 (0)121 237 1161 | michaella.mais@sea.org.uk
www.advancedengineeringuk.com
by EASYFAIRS

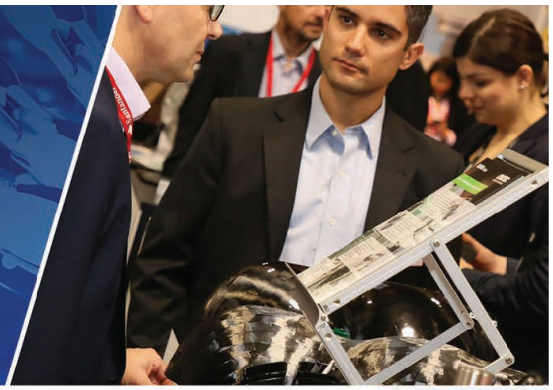

- **Exhibit under the SEA brand,** enjoying support and influence at the highest level from our President, Lord Whitby
- **Benefit from** the support of the leading surface engineering association, which attract key industry buyers.

Your SEA Pavilion package includes:

- 1 pod, located on the SEA pavilion
- Company Logo on each pod
- Hosted buyer session for all SEA members at the show
- Turnkey solution for new exhibitors
- GOPLUS package (access to full marketing campaign and onsite lead capturing devices)
- PR coverage for your company and product spanning multiple industries
- An affordable way to introduce yourself to the UK's largest annual engineering event
- A tailored match making service to arrange meetings with your ideal clients

All this for a discounted stand price:

Standard pods £1000
Corner pods £1500

Benefit from 8 co-locating zones under one roof; Aero Engineering; Composites Engineering; Automotive Engineering; Performance Metals Engineering; Connected Manufacturing and Medical Device Engineering.

Meet with:

- Production Directors
- Heads of R & D
- Design Engineers
- CEO/General Management/MD's
- Electronics Engineers
- Materials Engineers
- Heads of Quality Inspection
- Operations Manager/Director
- Biomedical Engineer
- Chief Engineer / Head of Engineering / Engineering Director / Principal Engineer
- Mechanical Engineer
- Manufacturing Engineer

Looking for a stand outside the SEA pavilion? Select your own stand and receive a 10% SEA member discount

Save £3500

For further details and to book your stand contact:
Michaella Mais: +44 (0)121 237 1161 | michaella.mais@sea.org.uk
www.advancedengineeringuk.com

by **EASYFAIRS**

Almor GROUP

FURNACE ENGINEERS AND ALLOY FABRICATORS

- Atmosphere Furnaces and Ovens
- New Vacuum Furnaces
- Vacuum Hot Zone Relines
- Furnace Fabrications
- Alloy Fabrications
- Replacement Parts
- Site Services
- Refractory Work
- Maintenance Contracts
- Plant Assessment and Refurbishments
- Process Controls

Almor GROUP — NG2 3GJ tel: +44 (0)115 986 8773 email: sales@almor.co.uk

Almor WELLMAN — DY4 7PQ tel: +44 (0)121 522 2522

Almor WILD BARFIELD — NG17 2HU tel: +44 (0)1623 555230

www.almor.co.uk www.wellman-furnaces.com

VACUUM FURNACES FOR HEAT TREATMENT

Fours Industriels B.M.I., your ideal partner for **vacuum furnaces**: standard and customized furnaces, turnkey solutions, retrofit...

- Gas Quenching
- Oil Quenching
- Brazing / Sintering
- Aluminum Brazing
- Tempering / Annealing
- Low Pressure Nitriding
- Low Pressure Carburizing
- Ion Vapor Deposition

B.M.I. Fours Industriels
T: +33 4 74 94 34 44
infos@tenova.com
www.bmi-fours.com

Local partner Almor Group

INDUSTRIAL FURNACES FOR HEAT TREATMENT

CODERE — INDUSTRIAL FURNACES FOR HEAT TREATMENT — Swiss quality since 1989 — 30 YEARS

Together, building your success !

Heat treatment processes in high precision :

Hardening
Carburising
Carbonitriding
Nitriding
Tempering
Annealing
Bainitic hardening

CODERE SA
CH - 2942 Alle | Switzerland
T +41 32 465 10 10 | F +41 32 465 10 11
info@codere.ch

LOCAL PARTNER Almor Group — Support you can rely on — Wellman Furnaces

Challenges and benefits of 'thru-process' temperature profiling in the heat treatment industry

Dr Steve Offley, Product Marketing Manager, PhoenixTM Ltd, UK

This article outlines the challenges and benefits of using 'thru-process' temperature profiling and survey systems in today's heat treatment industry.*

An overview is given to the principles of 'thru-process temperature profiling' where a data logger, thermally protected in a thermal barrier, is passed safely through the heat treatment process. As it travels, the data logger measures, via multiple thermocouple inputs, the temperature of the product being heat treated and/or ambient conditions in the furnace itself. The resulting temperature-profile graph 'thermal fingerprint' of the process provides all the necessary information to understand, control, improve and validate the heat treat process. The benefits of this approach are discussed in direct comparison with established techniques such as trailing thermocouples.

We examine how systems are engineered to get safely through such diverse processes as heat treatment of gear parts in low-pressure carburising furnaces with high-pressure gas quenches, monitoring gas carburising furnaces with integral oil quenches, homogenising aluminium logs, controlled atmosphere brazing (CAB) processes, and heat treatment of aluminium engine blocks in automated robotic-loaded T6 rotary furnaces. In all such cases, the specific unique designs of the profiling systems, which allow the collection of accurate product temperature through the entire heat treatment process, are discussed in detail. Many of these applications have not been previously possible to monitor with existing technology.

We look at how use of this type of system has evolved as temperature uniformity surveying (TUS) has become an ever-increasing requirement in aerospace and auto manufacturing industries. Efficient temperature uniformity survey solutions are presented to meet the requirements of CQI-9 and AMS2750E. As part of such discussion, the application of two-way RF telemetry is presented, allowing remote live real-time temperature monitoring of batch and continuous processes without the challenges of trailing thermocouples.

*Based on a paper presented at the *6th Asian conference on Heat Treatment & Surface Engineering*, Chennai, India, 5-7 March 2020.

Introduction

'Thru-process' temperature profiling in the heat treatment industry has been around for over twenty years and the principle of operation of these systems is generally well known; i.e. a multi-channel data logger (*Fig.1*) is protected by an insulated thermal barrier which allows the system to travel through a furnace together with the product(s) being heat treated (*Fig.2*). Thermocouples feed temperature data back to the data logger and, at the end of the process, the complete temperature profile can be examined and critical calculations made using purpose-built software supplied by the system manufacturer. Further developments have allowed the data to be sent out of the furnace via RF telemetry, allowing examination to be made in real time. The temperature profile obtained is basically a thermal fingerprint of the complete heat treat process. This thermal fingerprint is unique and critical to the understanding, control, improvement and validation of the heat treat process being undertaken.

Fig.1: Typical temperature data logger (up to 20 thermocouple inputs) used in a 'thru-process' system. Protected by a thermal barrier, it travels through the furnace with the product being monitored. Data are stored in memory for download post run or are transmitted live from the furnace using a RF telemetry option.

Benefits of 'thru-process' temperature profiling

Prior to the development of these systems, long 'trailing' thermocouples were often used to determine the actual product temperature profile through continuous furnaces. Feeding thermocouples through a continuous furnace had obvious disadvantages: mainly the difficulty of the operation itself, the limited number of thermocouples that could be used, disruption to production, and the accuracy of the data, given that products could not follow the test basket into the furnace (due to the trailing thermocouples), so the furnace loading decreased as the trial progressed.

As the 'thru-process' method was adopted, the monitoring operation simplified, the disruption to production was minimised, and the measurement could always be carried out in a fully-loaded furnace, reproducing actual product conditions. Data obtained from 'thru-process' profiling trials give an accurate assessment of how long a product soaked at a specified temperature, the differences in product temperature around the product basket, quench rates, etc. These data being used to calculate performance against specification, investigate process problems, and

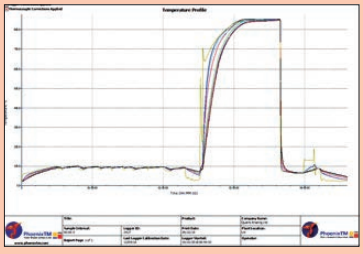

Fig.2: 'Thru-process' temperature monitoring system loaded in a charge basket, travelling into and through a continuous gas carburising furnace, and typical resulting thermal profile.

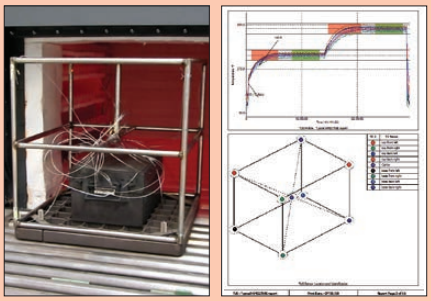

Fig.3: 'Thru-process' temperature monitoring system loaded into a batch furnace with TUS frame to complete a temperature uniformity survey. Resulting fully-documented TUS survey report.

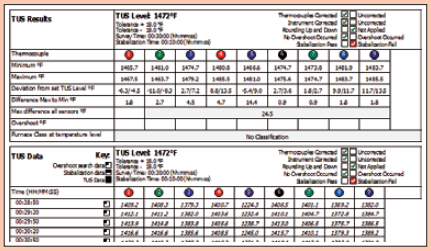

Table 1: Benefits of 'thru-process' temperature monitoring over traditional trailing-thermocouples methodology.

System	'Trailing thermocouples'	'Thru-process system'
Number measurements	Limited to 1 or 2 safely	Up to 20
Operator needed during run	Essential to allow safe cable transfer through furnace	Not needed (system travels independently as if product)
Cable length	Furnace length minimum (Cost / risk of damage)	Short (typically few feet)
Cable snagging / damage risk	Potential due to length. Automatic furnace doors may need to be overridden to prevent cable being trapped/damaged.	Minimal
Production stoppage	Yes - empty furnace needed (Probe retrieval post run!)	No - used during production run
Representative of true production conditions	No, as furnace may need to be empty	Yes, as performed during production run
Robotic product loading	Not feasible	Possible
Multiple process steps (furnace, quench, etc)	Difficult, if possible at all	Possible
Safety	Operators close to furnace to feed thermocouples (H&S)	No issues
Cost	Long thermocouples expensive to replace. Regular replacement risk.	Initial investment cost of system

optimise the process. An important development has seen these systems used as a primary method to survey furnaces to the AMS2750 specification (*Fig.3*), allowing the survey to be carried out with minimal disruption to production and saving many hours of furnace downtime, while the furnace was cooled and degassed to fit the trailing thermocouples.

A summary of the benefits of 'thru-process' temperature profiling, as opposed to trailing thermocouples, is provided in *Table 1*.

Engineering design – the 'thru-process' monitoring challenges

Although the operating principle of these systems seems relatively straightforward, with the evolution of furnace technology and drive for automated systems the design is often complex, as the 'thru-process' system needs to meet the unique challenges that come with different heat treatment processes. The main process challenge is protecting the measuring system from the heat of the process which, in some cases such as slab/billet reheat, where temperatures of up to 1250°C can be experienced for many hours, is a technical challenge in it's own right.

When designing or selecting the most appropriate 'thru-process' system, the following criteria need careful consideration:

Fig.4: PhoenixTM profile system post reheat furnace. Thermal barrier (TS07-300-3, 3.2 hours protection at 1300°C) loaded on cast steel beam blank reheated prior to rolling into structural metalwork for buildings/ skyscrapers. The PhoenixTM 1220 data logger, at the core of the system, stores data measured by the thermocouples inserted into blank at varying depths along its length.

Space or clearance in the furnace

Thermal barriers used in these processes will have a certain minimum size to withstand the process temperature and duration. Therefore, there needs to be adequate clearance at the furnace entrance and exit to allow the system through. Examination of other 'pinch points' in the furnace, such as baffles or 'knuckles' to separate heating zones, should also be made. Product loaded into the furnace in baskets may restrict the size and shape of the barrier that can be accommodated. With ever-increasing automation and multi-chamber furnace designs, space is ever becoming more limited, requiring drive to provide the most space-efficient barrier solutions.

Furnace temperature

This does not just refer to the maximum process temperature, which is used to determine the type of insulation to be used, and the thermal barrier material, but also a calculation needs to be made to determine the 'Adjusted Process Temperature' (APT). This takes into account rates of heating, cooling and soaking, at the various temperature levels, and is used by the system manufacturer to determine the actual thermal barrier size required to get the system through the process.

Process duration

The full process time within the furnace is used in the APT calculation. Added to this is the time period after exit from the furnace until the system can be accessed and the data logger removed. A safety margin is also added in case of stoppages in the process. Knowing the full process duration and the APT, the size of the thermal barrier can be determined.

Atmosphere in the furnace

The furnace atmosphere will not only determine the material the thermal barrier will be constructed from, but may also affect the barrier's performance; e.g. a hydrogen atmosphere will lessen the thermal performance, whereas a vacuum will increase the performance. The furnace atmosphere will also determine the thermal barrier 'technology' that can be used. There are two basic technologies that keep the data logger at a safe operating temperature:

- Heat sink' technology is a 'dry' technology, where the data logger is housed in a heat sink (a container filled with a eutectic salt) which changes phase at 58°C, keeping the data logger at a stable temperature during the phase-change period. A lower-operating–temperature data logger can be used in this type of barrier.
- 'Evaporative' technology uses boiling water to keep the high-temperature data logger (maximum operating temperature

Fig.5: Photo and schematic of a conventional heat sink barrier technology.

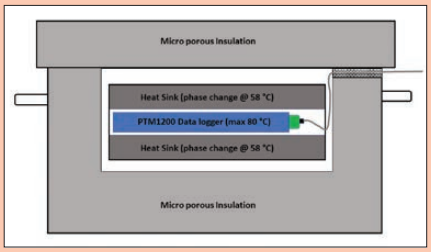

Fig.6: Photo and schematic of an 'evaporative' barrier technology.

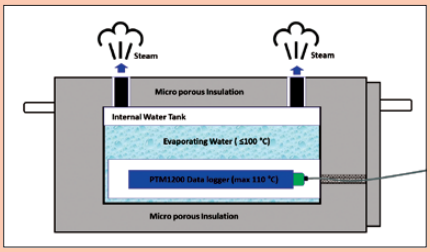

110°C) at a stable operating temperature of 100°C as the water changes phase from liquid to steam. The advantage of 'evaporative' technology is that a physically-smaller barrier is often possible. It is estimated that, with a like-for-like size (volume) and weight, an evaporative barrier will provide in the region of twice the thermal protection of a standard thermal barrier with micro-porous insulation and heat sink.

Since steam is generated as a by-product of the superior-protection evaporative barrier technology, it is prohibited from use in certain processes where the furnace environment cannot be contaminated. For such processes as carburising, nitriding, vacuum heat treatment and controlled atmosphere brazing (CAB), the heat sink technology is the only viable option.

Quench within the process

If a quench is involved, the type and duration of the quench is important. Historically, monitoring the quench was ignored and bypassed due to the technical difficulties of sending a system through. Obviously, in many processes, knowing the cooling rate of the heat-treated product is as important as knowing the time at temperature of the heating phase (soak) to achieve the correct metallurgical structure of the metal, whilst avoiding distortion and even quench cracks.

- Gas quenches in low-pressure carburising processes are common, but the thermal barrier may require a 'gas deflector', if the pressure of the quench is high (5-20bar), to prevent distortion of metalwork or damage to the thermal insulation.
- Water quenching in T6 processes requires the thermal barrier to resist full immersion in water from high temperature, and the technology for this is well established.
- The technology for passing a system through either salt or an oil quench has now been developed, combining a fully-sealed inner barrier and outer robust sacrificial blocks of insulation, allowing safe transfer through and monitoring of the full quench. Monitoring the oil quench process is discussed in more detail in Case 2 below.

Innovative 'thru-process' temperature monitoring solutions in the heat treatment industry

Case 1: Low-pressure carburising (LPC) – temperature profiling and TUS

Carburising is one of the most critical heat treatment processes employed in the manufacture of automotive components. Also referred to as case hardening, it provides necessary surface resistance to wear, whilst maintaining toughness and core strength essential for hardworking automotive parts.

The carburising process is achieved by heat treating the product in a carbon-rich environment, typically at a temperature of 900-1050°C. The temperature and process time influences significantly the depth of carbon diffusion and associated surface characteristics. Critical to the process, following diffusion, is a rapid quenching of the product to generate the microstructure giving the enhanced surface hardness whilst maintaining a tough product core.

Increasing in popularity in the carburising market is the use of batch or semi-continuous low-pressure carburising furnaces. Following the diffusion, the product is transferred to a high-pressure gas quench chamber where it is rapidly gas cooled using typically nitrogen or helium at up to 20bar.

In such a process the technical challenge is twofold. The thermal barrier must be capable of protecting against not only heat, during the carburising, but also very rapid pressure and temperature changes inflicted by the gas quench. From a data collection perspective, to efficiently perform temperature uniformity surveys at different temperature levels in the furnace, it is important that temperature readings can be reviewed live from the process, but without need for trailing thermocouples.

To protect the thermal barrier in the LPC process with gas quench, the barrier construction needs to be able to withstand constant temperature cycling and high gas pressures. The design and construction features include:

- Metalwork - 310 stainless steel employed to reduce distortion at high temperature, combined with internal structural reinforcement.
- Insulation - ultra-high-temperature micro-porous insulation minimises shrinkage problems.
- Rivets – close-pitched copper rivets reduce carbon pick-up and maintain strength.
- Lid expansion plate – reduces distortion during rapid temperature changes.
- Catches – heavy-duty catches eliminating thread seizure issues.
- Heat sink – internal heat sink to provide additional thermal protection to data logger.

During the gas quench, the barrier needs to be protected from nitrogen or helium gas pressures up to 20bar. Such pressures on the flat top of the barrier would create excessive stress to the metalwork and internal insulation / logger. Therefore a separate gas quench deflector is used to protect the barrier. The tapered top plate deflects the gas away from the barrier. The unique design means the plate is supported on either four or six support legs. As it is not in contact with the

Fig.7: Thermal barrier fitted with quench deflector being loaded into LPC batch furnace with TUS frame as part of temperature uniformity survey.

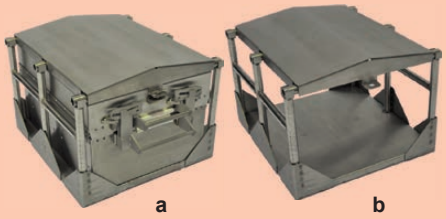

Fig.8: High-performance LPC thermal barrier: (a) combined barrier and quench deflector; (b) separate quench deflector frame (6 legs).

barrier, no force is applied directly to the barrier and the force is shared between the support legs. In addition to protecting against pressure, the quench shield also acts as an additional reflective IR shield, reducing the rate of IR absorption by the barrier in the vacuum heating chamber.

Applying the 'thru-process' monitoring technique, there is no hardwired link between the monitoring system within the furnace and the outside world, so providing already-discussed operational benefits. To achieve real time measurement, as if using trailing thermocouples, the data measurements therefore need to be transferred remotely. This is done using a high-performance two-way radio telemetry system. The temperature readings are transmitted as a RF signal from the data logger, via external barrier antenna from inside the furnace, to a receiver connected to the external monitoring PC (*Fig.9*). The two-way communication protocol allows not only data collection but also direct control of the data logger (reset/download) inside the furnace.

Provided with a high-performance 'LwMesh' networking protocol, the RF signal can be transmitted through a series of routers linked back to the main co-ordinator connected to the monitoring PC. The routers are located at convenient points in the process, positioned to maximise signal reception. Being wirelessly connected, they eliminate the inconvenience of routing communication cables or providing external power as needed on other commercial RF systems. The routers can be positioned to exactly where they are needed and be moved with ease when changes are required. Using the repeater network, multiple furnaces can be monitored either simultaneously or sequentially. Even in large plants, a chain of remote repeaters can transfer the process data direct from the furnace back to the furnace control room or office.

Performing TUS to comply with AMS 2750E/CQI-9 standards requires that the survey, analysis of data and reporting are performed in agreement with strict criteria. This can be tedious and lengthy unless using a customised TUS survey software analysis package such as the PhoenixTM *Thermal View Survey* software.

Features incorporated into the *Thermal View* software to provide full TUS capability include the following:

- TUS Level Library - set-up TUS level templates for quick efficient survey level specification (Survey temperature, tolerance, stabilisation and times).
- TUS Frames Library - show clearly exact TUS frame construction and probe location using frame library templates – frame centre and eight vertices.

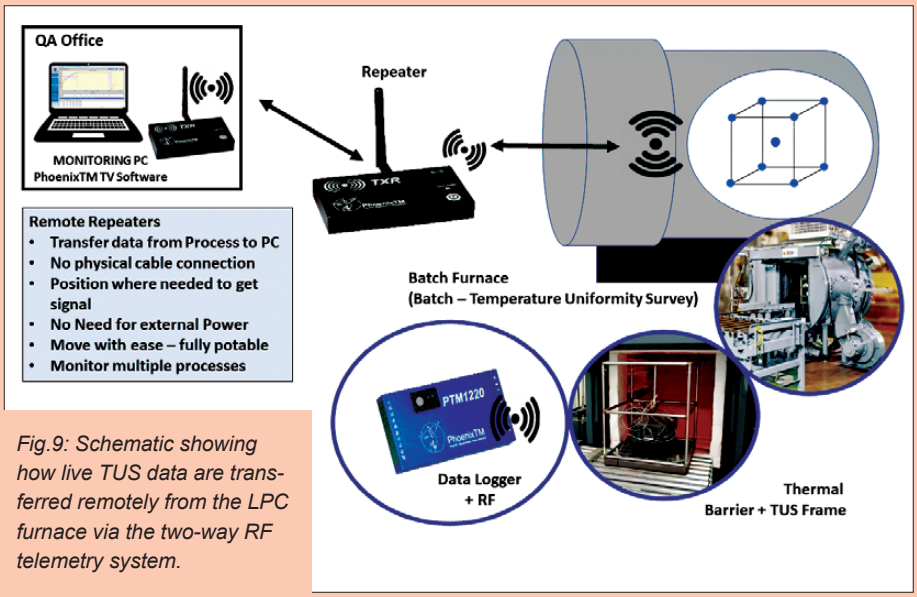

Fig.9: Schematic showing how live TUS data are transferred remotely from the LPC furnace via the two-way RF telemetry system.

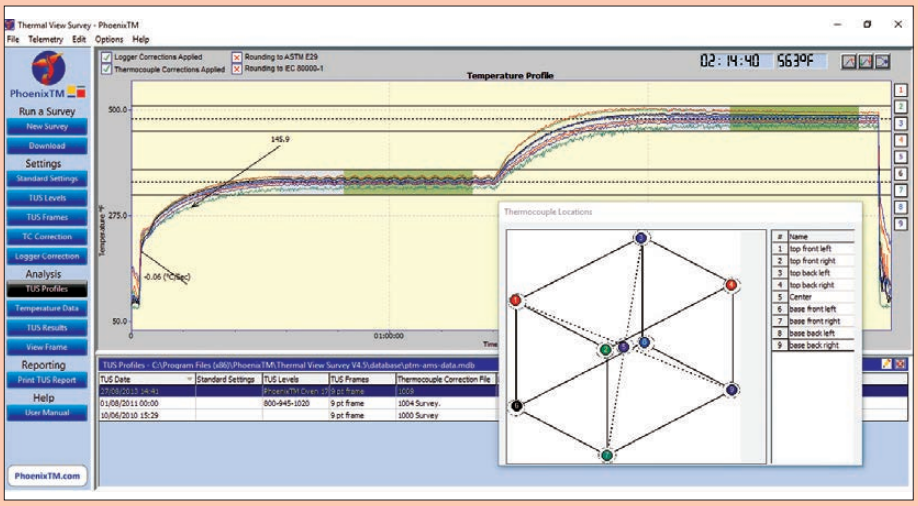

Fig.10: PhoenixTM Thermal View Survey *software showing a TUS profile at three set survey temperatures. The probe map shows exactly where each probe is located and easy trace identification. Detailed TUS report generated with efficiency.*

- Logger Correction File - create a logger correction file to compensate TUS readings automatically from the logger's internal calibration file.
- Thermocouple Correction File - create the thermocouple correction file and use to compensate TUS readings directly.
- TUS Result Table & Graph View - for each TUS temperature level see, from the graph or TUS table, full survey results instantaneously.
- Furnace Class Reporting - report the specified furnace class at each temperature level.

Case 2: Gas carburising with integral oil quench – temperature profiling

A common process in today's heat treatment industry is the carburising of steel products for use in the automotive industry, a popular heat treatment technology used being the sealed-quench gas carburising furnace with an integral oil quench. For such furnace technology, the historic limitation of 'thru-process' temperature profiling has been the need to bypass the oil quench and wash stations. Obviously passing a conventional hot barrier through an oil quench creates potential risk of both system damage from oil ingress, barrier distortion and general process safety.

In such carburising processes, the oil quench rate is critical to the metallurgical composition of the steel but also to reduction/elimination of product distortion and quench cracks; so the need for a monitoring solution has been significant. Regular monitoring of the quench is important as ageing results in decomposition, oxidation and contamination of the oil, all degrading the heat transfer characteristics and quench efficiency.

To address the process challenges, a



Fig.11: 'Thru-process' temperature monitoring system for use in sealed-quench carburising furnace: (a) barrier construction; (b) system in use.

unique barrier design has been developed that both protects the data logger in the furnace (typically 3 hours at 925°C) but also protects during transfer through the oil quench (typically 15 minutes) and final wash station (*Fig.11*).

The key to the barrier design is the encasement of a sealed inner barrier with its own thermal protection, with blocks of high-grade sacrificial insulation contained in a robust outer structural frame. Initial attempts to encase the thermal barrier in a sealed enclosure were abandoned due to internal pressure build up in a container softened by holding at the high carburising temperature.

Case 3: Homogenisation of aluminium logs in a walking-beam furnace – temperature profiling

After casting, aluminium logs are homogenised before being supplied to the end users, typically extrusion companies. This heat treatment has been carried out historically in batch furnaces but today there is an increasing move to walking-beam furnaces for continuous production. The walking-beam furnace creates a significant challenge to the temperature monitoring process as the logs rotate as they move through the furnace (12 to 13 hours at 580°C). Such rotation would make a trailing thermocouple approach to monitoring impossible but also creates a challenge for a 'thru-process' system which needs to travel though the furnace in the same way as the product.

To address the monitoring challenge, a unique cylindrical barrier design is used. As shown in *Fig.12*, the cylindrical barrier is bolted securely (prevent sagging) to the end of a cut-down aluminium log. The diameter of the barrier matches that of the aluminium log so that it can freely rotate with the product through the furnace. Long thermocouples are run along the length of the log, running within a cut-out slot, to prevent tangling, and fixed at locations and depths required.

To provide the thermal protection for the excessive heat treatment duration and space restrictions, an evaporative thermal barrier technology is the only viable option. This itself creates challenges as the design needs to prevent loss of water from the tank, as the whole system rotates, to preserve thermal protection of the data logger.

Employing the 'thru-process' temperature monitoring solution, major key casting plants have been able to measure the temperature profile of their aluminium logs in all three stages of the homogenisation process. With such critical information, it has been possible to minimise time in the soak zone to increase productivity and optimise fuel efficiency, without compromising product quality.

Case 4: Aluminium controlled atmosphere brazing (CAB)

The aluminium brazing of radiators and condensers is commonly performed using a continuous controlled atmosphere brazing (CAB) process. As part of this brazing process, the control of the product temperature is critical to achieve selective melting of the filler alloy (580-620°C) to allow it to flow and fill the joints between the parent metal. As the name of the process suggests, the atmosphere in the furnace must be inert and devoid of water vapour or oxygen. If such contaminants are present, unwanted oxidation of the aluminium surface can be experienced and formation of highly-corrosive HF from flux chemicals can be a risk to thru-process monitoring equipment.

When designing a 'thru-process' temperature profiling system for monitoring a CAB process, there are two major technology challenges to address. To allow safe passage through the conveyorised furnace, the barrier needs to be low profile, with a safe clearance to allow for deterioration / flux build-up of mesh belts with age, reducing furnace height clearance even further. Construction of the barrier and materials used should be such as to prevent outgassing of either water or oxygen into the furnace, to protect the controlled atmosphere whilst preventing chemical damage of the barrier itself.

Traditional thermal barriers are constructed with unprotected glass-cloth-covered microporous insulation. Moisture and air trapped in such materials have been shown to severely damage the barrier and reduce its working life due to hydrofluoric acid formation with flux chemicals.

To overcome such issues, a new sealed barrier design has been developed as shown in *Fig.13*. The front-loaded data logger tray and metal construction limits exposure of insulation materials to potential HF corrosion. The barrier is available with a nitrogen purge facility to remove any risk of outgassing of oxygen into the furnace.

Implementing such construction and set-up techniques, barriers have been shown to operate successfully for in excess of 2500 runs without issue.

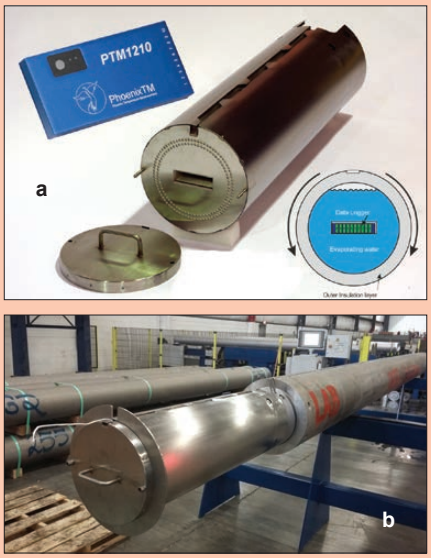

Fig.12: Cylindrical evaporative thermal barrier technology for use in walking-beam aluminium log homogenisation furnace: (a) cylindrical barrier design and water tank schematic; (b) barrier secured to test aluminium log.

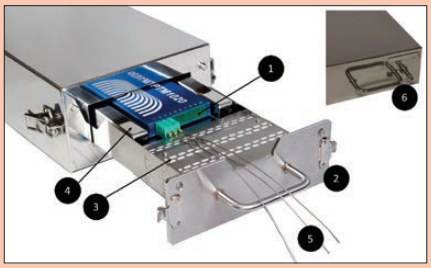

Fig.13: CAB brazing thermal barrier design: (1) data logger (6 or 10 channels); (2) front-|loading logger tray with encapsulated insulation; (3) thermal breaks reduce conduction to data logger; (4) heat sink provides additional thermal protection; (5) mineral-insulated thermocouples attached to radiator fin; (6) nitrogen feed nozzle for insulation purge.

Case 5: Aluminium engine block T6 heat treatment in rotary furnace

In modern rotary-hearth furnaces such as that shown in *Fig.14*, temperature profiling using trailing thermocouples is impossible, as the cables would wind up in the furnace transfer mechanism. Due to the central robot loading and unloading and elimination of charging racks/baskets, the use of

Fig.14: Robot loading of combined 'thru-process' system with engine block into BSN rotary T6 furnace. The thermal barrier is designed with a combination of thermal insulation technology capable of fitting in the engine block cavity. With a thermal protection capability of 550°C for several hours, the system has the ability to monitor the complete T6 process, including solution reheat, water quench and aging.

Fig.15: The 'Humpback' evaporative thermal barrier with stepped profile to match the product and allow direct loading by robotic gripper into the furnace with test product.

a conventional thru-process system would also be a challenge.

To overcome the loading restrictions, a unique thermal barrier was developed, small enough to fit inside the cavity of the engine block and allow automated loading of the complete combined monitoring system and product. The system allowed BSN Thermoprozesstechnik GmbH, in Germany, to commission the furnace accurately and efficiently and thereby optimise settings, to not only achieve product quality, but also ensure energy-efficient cost-effective production.

Faced with a similar robotic-loading issue, the phase-evaporative barrier shown in *Fig.15* was developed. Due to its unique form, the barrier has been named the 'Humpback' barrier. The shape of the barrier was designed purposefully to match the shape of the product being processed, so that the robot gripper could pick up the barrier and product simultaneously and load into the rotary furnace.

Summary

Thru-process temperature profiling provides today's heat treater with a safe efficient means to accurately measure both the furnace and product temperature throughout the whole thermal treatment. With modern innovations and experienced engineering design, many systems now offer real-time monitoring of processes simply not possible with a trailing thermocouple. With such information, the engineer can understand, control, optimise and validate the process being undertaken with confidence. Not only can engineers ensure product quality and drive productivity improvements, they can also perform accurate fine-tuning of furnace parameters to achieve potential energy savings.

THE AUTHOR

Dr **Steve Offley** is a Product Marketing Manager at PhoenixTM whom he joined in 2018 after 22 years experience in the industrial temperature profiling market with another well-known company.

Steve's academic background includes graduating from Coventry Polytechnic with a BSc (Hons) in Applied Chemistry and later a PhD from Loughborough University in Analytical Chemistry.

CRONITE
Better by design

HEAT TREATMENT
Handling Fixtures

Design and manufacture of cast heat treatment handling fixtures in heat resistant Nickel Chrome alloys.

- Low fixture weight / high component load
- Energy efficiency
- Furnace efficiency

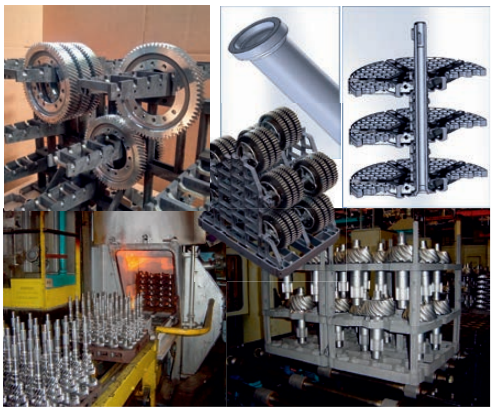

Cronite Group - www.cronite-group.com

Advertising in *Hotline*

2020 ADVERTISING RATES

Single-insertion charges for black-and-white ads:

Size	Dimensions	Charge
Quarter page	121mm high x 86mm wide	**£199** +VAT
Half page	121mm high x 178mm wide or 254mm high x 86mm wide	**£352** +VAT
Full page	254mm high x 178mm wide	**£630** +VAT

For full-colour ads, add an extra £265+VAT to each of the above charges.

Advertisers in four consecutive quarterly editions of *Hotline* are entitled to a series rate where all of the above prices are discounted by 20% per insertion.

2020 DEADLINES

Issue	Publication month	Order deadline	Copy deadline
Hotline 160	June	8 May	15 May
Hotline 161	September	7 August	14 August
Hotline 162	December	6 November	13 November

For further details, contact *Hotline* Editor Alan J. Hick.
Tel: 0121 329 2970; e-mail: *mail@chta.co.uk*

SURFACE ENGINEERING Awards 2021

celebrating excellence

Welcome to the Surface Engineering Gala Dinner and Awards 2021, the biennial event that recognises, rewards and celebrates excellence in all branches of surface finishing in the UK.

This prestigious awards ceremony is eagerly anticipated by Surface Engineering Association members to showcase their hard work and achievements during the previous 12-24 months.

The Awards will take place on Friday 19thth March 2021
Park Regis Birmingham, 160 Broad Street,
Birmingham B15 1DT

Sponsorship

Should you wish to sponsor one of the award categories, or become headline sponsor, there are several packages available, including new for 2021 categories.

To register your interest, and take full advantage of the pre-show publicity, please contact Michaella Mais Business Development and Membership Manager
T: 0121 237 1161 E: michaella.mais@sea.org.uk

Entry

All entries are free and categories are as follows:

- Marketing
- Quality
- Environmental
- Process Innovation
- Outstanding Company Achievement

Special Awards All are encouraged to recommend themselves, other individuals or organisations for:

- Outstanding International Contribution
- Meritorious Service to the Heat Treatment Industry
- Ray Alford Individual Achievement

Remember the more categories you enter the better your chance of winning.

Tickets

Includes pre-dinner drinks reception, 3 course meal and entertainment during the Awards ceremony, after dinner music and entertainment.

Carriages at 1am.

Delegate place - £75
Table of 10 - £675

Dress Code: Black Tie

NEW DATE

Friday 19th March 2021
Park Regis Birmingham

Please see up-to-date information regarding the Awards at https://www.sea.uk/2021-awards/ and please get in touch if you require any further information.

SSi SuperSystems Europe

Measure.
Control.
Record.

Increase product quality and reduce process costs

Analysers
Invaluable preventive maintenence tools that verify furnace atmopshere.

Sensors/Probes
Industry leading sensors desgined for heat treatment furnaces measure O_2, dewpoint, H_2, CO, CO_2, CH_4.

Complete Systems
Our UK engineers design, build, and install innovative systems to control and automate furnaces.

Controllers and Recorders
Touchscreen controllers and recorders with easy to use and advanced control features for CQI-9 and NADCAP compliance.

Flow Meters
eFlo Flow Meters electronically measure, control, totalise heating and process gases.

Software
SuperData PC Software displays, summarises and creates custom reports on all historical furnace and load data.

Come and visit our training & demonstration centre in Birmingham, or contact us to arrange a visit by sales engineer!

www.supersystemseurope.com 0121-306-5180

Register for a regular copy of our printed *Hotline* newsletter

Go to...
www.chta.co.uk

SOLO Switzerland

www.solo.swiss

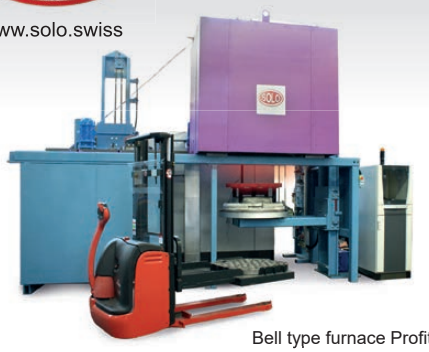

Bell type furnace Profitherm

Laboratory ovens 300°C

Borel
Standard Furnaces & Ovens
Switzerland

www.borel.swiss

Retort furnaces with controlled atmosphere

Laboratory furnaces 1100–1600°C

Continuous furnace SOLO 322

Industrial ovens 250°C

Chamber furnaces 600–1100°C

Heat treat furnaces with quenching tank 1050°C

SOLO Swiss SA
Grandes-Vies 25, 2900 Porrentruy – Switzerland

Tel. +41 32 465 96 00
Fax +41 32 465 96 05

mail@solo.swiss
www.solo.swiss

mail@borel.swiss
www.borel.swiss

WWW.ECM-FURNACES.COM

ECM TECHNOLOGIES

THE WORLDWIDE REFERENCE FOR LOW PRESSURE CARBURIZING SOLUTIONS

ICBP® DUO OIL QUENCHING

- REPLACEMENT OF SEALED QUENCH FURNACES
- HIGH ENERGY EFFICIENCY, REDUCED CO_2 EMISSIONS
- STRONGLY IMPROVED PRODUCTIVITY
- OPTIMIZED TREATMENT COSTS

ECO FRIENDLY

ECM TECHNOLOGIES
AREA SALES MANAGER - PATRICK POULOUX - P.POULOUX@ECMTECH.FR
UK SALES AGENT - MARTIN WEST +44 1932 868006 -MARTIN@WEST.EU.COM

EXPERTS IN
HEAT TREATMENT FIXTURES AND JIGGING

Profit from over 50 years experience
In-house design and pattern making
Buy back service available to re-cycle old castings

wallwork

Call **0161 763 7494**
wallworkcastalloys.com

FORTHCOMING EVENTS

Diary

Subject to pandemic postponement/cancellation:

September 14-15 2020
INTRODUCTION TO PYROMETRY
Manchester, England *https://p-r-i.org/pri-training/*

September 17-18 2020
PRI WEBINAR: INTRODUCTION TO PYROMETRY
https://p-r-i.org/pri-training/

September 22-24 2020 (New date)
21ST CHINA (GUANGZHOU) INTERNATIONAL HEAT TREATMENT & INDUSTRIAL FURNACE EXHIBITION
Guangzhou, China
www.julang.com.cn/english/reculi/index.asp

September 23-24 2020
PRI WEBINAR: INTRODUCTION TO PYROMETRY
https://p-r-i.org/pri-training/

September 23 2020
SPAIN HEAT TREATMENT CONGRESS
Bilbao, Spain *http://metalspain.com/heat-treatment.htm*

September 23-26 2020
THERMPROCESS CHINA
Shanghai, China
www.tubechina.net/en/exhibition/TPChina.html

September 24 2020
PRI WEBINAR: HEAT TREATMENT IN BRAZING
https://p-r-i.org/pri-training/

September 29 2020
PRI WEBINAR: BASIC HEAT TREATMENT
https://p-r-i.org/pri-training/

September 30 – October 2 2020
FURNACES NORTH AMERICA 2020 (VIRTUAL)
14th FNA conference and exposition, produced by the Metal Treating Institute and its media partner, *Industrial Heating* magazine, goes online. *www.furnacesnorthamerica.com*

October 6-8 2020
EUROPEAN MODERN FURNACE BRAZING SCHOOL
Pontardawe, Wales
www.wallcolmonoy.com/products-capabilities/brazing-alloys/brazing-school/

October 14 2020 (New date)
MEXICO HEAT TREATMENT CONGRESS
Queretaro, Mexico *http://metalspain.com/mexico-HT.htm*

October 20-22 2020
76TH HÄRTEREIKONGRESS
Germany's heat treatment congress goes online:
https://www.hk-awt.de/

October 19-20 2020
INTRODUCTION TO PYROMETRY
Derby, England *https://p-r-i.org/pri-training/*

October 21-22 2020
PRI SPECIAL PROCESS COURSE: HEAT TREATING (OWNER)
Derby, England *https://p-r-i.org/pri-training/*

October 22 2020
CHTA PUBLICITY SUBCOMMITTEE*
Birmingham, England

November 4-5 2020
ADVANCED ENGINEERING 2020
Birmingham, England *www.advancedengineeringuk.com*

November 5 2020
CHTA MANAGEMENT COMMITTEE*
Birmingham, England

November 9-10 2020
NADCAP AUDIT PREPARATION – HEAT TREAT
Coventry, England *https://p-r-i.org/pri-training/*

November 11-12 2020
INTRODUCTION TO PYROMETRY
Coventry, England *https://p-r-i.org/pri-training/*

**Members wishing issues to be raised at CHTA meetings should notify CHTA's Secretary, well beforehand, at* mail@chta.co.uk.

Market Movements

ANALYSIS OF QUESTIONNAIRE REPLIES RELATING TO 26 CHTA MEMBER SITES

"THIS QUARTER" =

1 APRIL - 30 JUNE 2020

= TURNOVER INDEX 100

OVERALL ANALYSIS (26 SITES)	Mean index
This quarter last year	149.8
Last quarter	140.8
Predicted next quarter	121.9

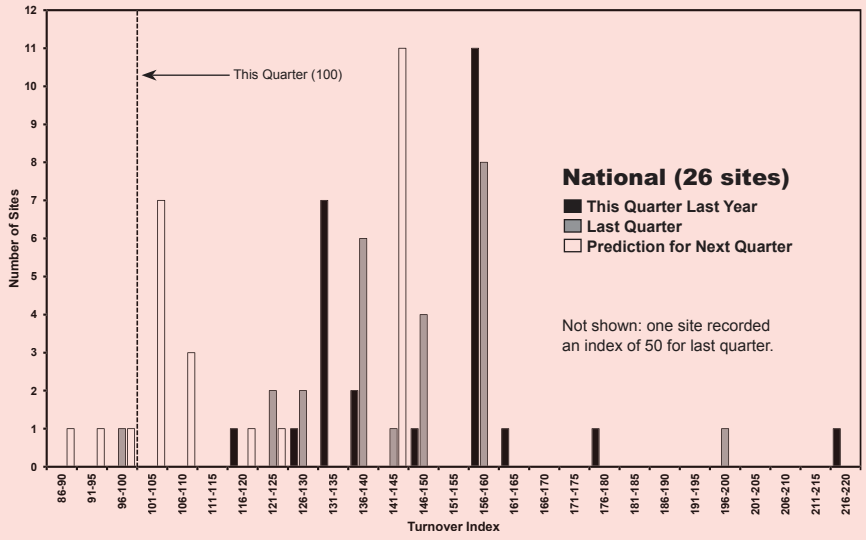

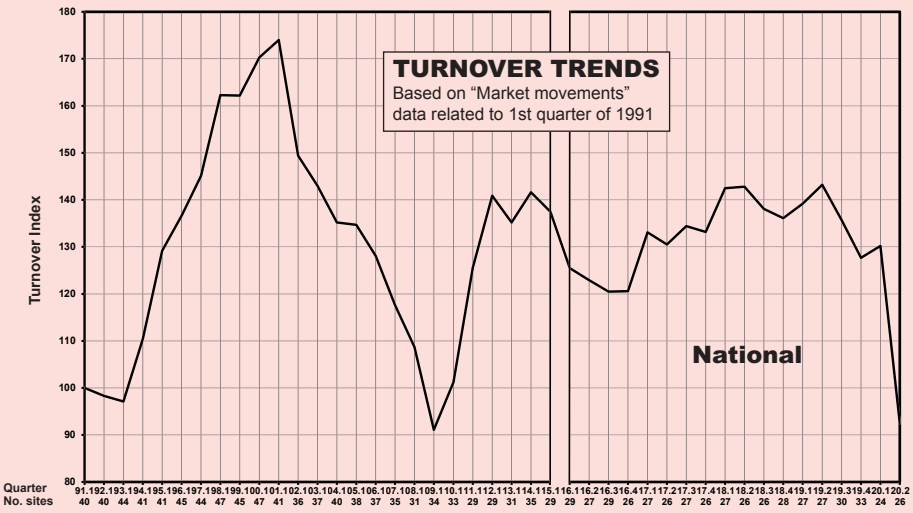

November 11-12 2020
CONFERENCE ON HEAT TREATMENT OF METAL
Jihlava, Czech Republic *www.htconference.cz/en/*

November 17 2020
PRI WEBINAR: HEAT TREATMENT OF ALUMINIUM ALLOYS *https://p-r-i.org/pri-training/*

November 30 - December 2 2020 (New date)
EUROPEAN CONFERENCE ON HEAT TREATMENT 2020
Antwerp, Belgium
The emphasis of this English-language conference will be on carburising, carbonitriding and carbon-based surface engineering. *www.a3ts.org/echt2020/*

December 7-8 2020
INTRODUCTION TO PYROMETRY
Cambridge, England *https://p-r-i.org/pri-training/*

December 10 2020
PRI WEBINAR: AMS2750 CHANGES IN REV F
https://p-r-i.org/pri-training/

December 15 2020
PRI WEBINAR: HEAT TREAT CONTROL & INSPECTION
https://p-r-i.org/pri-training/

NICKEL PRICE (US$/lb)

Please send comment and news items for December's *Hotline* 162 to: *mail@chta.co.uk*
Deadline: November 13th